

E-touch compact -YC

■ Target Model

HST / LA / CT2 / CT

Easy-to-hold compact model equipped with useful functions for the work floor



- 7.5-inch display
- Weight: 1.2 kg
- Handheld controller
- One enable switch
- SD card
- LAN port (available as option)

All-Axis Servo Driven Type

Single-Axis Servo Driven Type

Swing Type

Side Entry Type


For Vertical Molding Machine

Stock System

Product Series Guide [P11]

ECO Vacuum™

This function monitors the suction pressure, and when taking out a product, shuts off the suction circuit once the suction pressure has stabilized. By turning off suction while the contact surface is sealed by vacuum, suction can be maintained without using any air, which contributes to reduced air consumption.

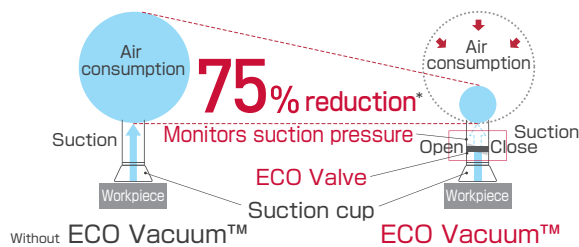

*Measured at Yushin during product testing


ECO Monitor™

Approximate power consumption and air consumption can be monitored for each molding cycle. ECO Vacuum status can also be monitored for each vacuum circuit.




Predictive Maintenance

Take-out robot status is continuously monitored for any signs of potential failure, which are indicated by a message display when detected.

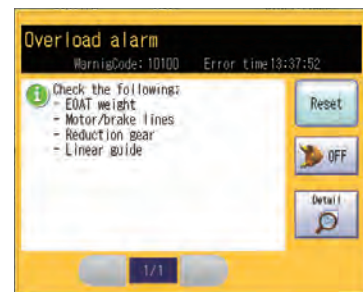

Wait for Step-up

When the take-out robot is stopped for a certain period of time during auto operation, the conditions that the robot is waiting for are indicated on the screen. This function is useful in identifying causes of stoppages when the robot has stopped in a waiting mode.

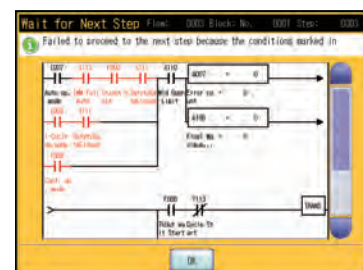

Controllers